


Key Features

- Integrated with myViewBoard software
- Multi-tasking capabilities for enhanced lesson delivery
- •Embrace simplicity and organization with the USB-C one-cable solution, offering 65W of Power Delivery.
- •Intuitive user interface and fast app launch for smooth operation
- Powered by Android 11



Product **Description**

The ViewBoard IFP33 Series harmonizes a touch display with versatile software to create a comprehensive classroom solution for interactive and engaging learning. This interactive flat panel delivers exceptional image quality in 4K UHD, thanks to cutting-edge bonding technology that provides clearer colors, enhanced contrast, and reduced glare. The 40-point touchscreen interface, equipped with Ultra Fine Touch Technology, empowers students and teachers to collaborate seamlessly, using either their fingers or dual-tip pens, for an intuitive pen-on-paper experience. Powerful built-in front-facing speakers and a USB-C port sort out for a complete and convenient multimedia experience. The ViewBoard IFP33 Series is preinstalled with myViewBoard to offer advanced lesson delivery options for teachers and powerful device management tools for administrators.

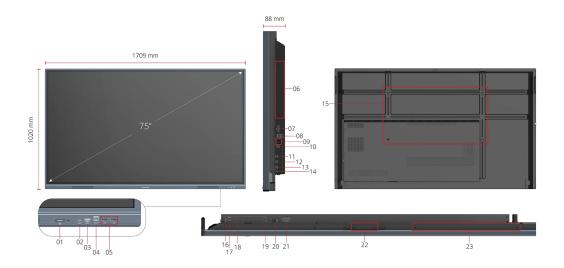

- 1 POWER ON/OFF
- 2. USB C
- 3. HDMI 1
- 4. TOUCH 1
- 5. USB 3.0x2
- 6. OPS Slot
- 7. RS-232

- 8 LAN
- 9. USB 2.0x2
- 10. TOUCH 2
- 11. HDMI 2 12. HDMI 3
- 13. HDMI OUT
- 14. USB

15. VESA® Wall Mount (800x400mm) 22. Wi-Fi Slot

23. Sensor Mount

- 16 SPDIE
- 17. AUDIO in
- 18. AUDIO out
- 19. VGA
- 20. Power On/OFF
- 21. AC IN

DISPLAY		BUNDLE SOFTWARE	
Panel Size:	75"	Basic Annotation Software:	myViewBoard Whiteboard
Panel Type:	TFT LCD Module with DLED Backlight. IPS	Pro Annotation Software:	myViewBoard for Windows (Embedded in optional Windows Slot-in PC)
Display Area (mm):	1649.664(H) × 927.936(V) (74.6" diagonal)	Wireless Presentation:	myViewBoard Display
Aspect Ratio:	16:9	Wireless Presentation with Touch	Yes
Resolution:	UHD 3840x2160(Pixels)	Feedback: Viewboard Cast:	
Colors:	1.07B colors	SPECIAL FEATURES	(combine slot-in
Brightness:	350 nits	All-in-one USB port:	PC/Android/HDMI USB port) Front "SmartPort™ USB" to all
Contrast Ratio:	5000:1 (max. with DCR enabled)		channels.
Response Time:	8ms	Simple LAN sharing between IFP and slot-in device:	10/100M for Android & Slot-in PC
Viewing Angles:	H=178, V=178	Light Sensor:	Yes
Backlight Life:	30,000 Hours (Min.)	POWER	tes
Surface Treatment:	Hardness:7H Anti-glare coating	Voltage:	100-240V AC
Orientation:	Landscape	Consumption:	On:106W; Off: ≤ 0.5W
PLATFORM		ERGONOMICS	OII. 100W, OII. \$ 0.5W
Processor:	Quad-core ARM Cortex (A55*4)	Wall Mount (VESA®):	800x400
RAM:	4GB DDR4	OPERATING CONDITIONS	0000400
Storage:	32 GB	Temperature (° C):	0°C to 40°C
тоисн		Humidity:	20% ~ 80% RH non-condensing
Type/ Tech:	Ultra Fine Touch Technology	DIMENSIONS (W X H X D)	20% Turnen condending
Touch Point:	40 points touch		1709 x 1020 x 88 mm / 67.3 x
INPUT		Physical (inch / mm):	40.2 x 3.5 in
HDMI:	HDMI-IN 2.0 x 3 (3840x2160 @60Hz)	Packaging (inch / mm):	1863 x 225 x 1140 mm / 73.3 x 8.6 x 44.9 in
RGB / VGA:	x1	WEIGHT	
Audio:	x1	Net (lb / kg):	104.3lb/47.3kg
RS232:	x1	Gross (lb / kg):	133.5lb/60.55kg
OPS:	x1 (Optional Intel Standard OPS)	REGULATIONS	
WiFi:	x1 (Optional VB-WIFI-002/VB- WIFI-004/VSB-050)	FCC/ICES003, EPEAT, CE EMC, LVD or CB, RoHS Green BOM & RoHS DoC, ErP, REACH SVHC List & DoC, EEL, WEEE, BSMI,BIS	
OUTPUT		PACKAGE CONTENTS	
HDMI:	HDMI 2.0 x1	1. 3m power cord by ship area 2. Remote control with AAA battery 3. 3m touch USB cable 4. Touch pen x 2 (VB-PEN-009) 5. Quick Start Guide + Compliance statement 6. RS232 adapter 7. Clamp x 5 8. Camera Plate 9. Screw x 8 (camera 2+2, wall mount 4) 10. HDMI cable 3m	
Audio:	x1		
SPDIF:	x1		
LAN		COMPATIBLE SLOT-IN PC	
RJ45:	x2	VPC2-O series/VPC2-O-1B series	/VPC12-WPO-15/16
USB			
Type A:	USB3.0 x4 (Front x2, Rear x2); USB2.0 x1		
Type B:	x2 (Front x1, Rear x1)		
Type C:	Frontx1 (PD65W + DP1.2 + Data USB2.0 + 10M/100M sharing)		
SPEAKERS			
16W x 2			
TOP CAMERA PLATE			

Yes

EMBEDDED OS
Android 11