



VIEWBOARD

ViewBoard 6532-2


Key Features

- All-in-one myViewBoard™ suite with Whiteboard, Display, and Manager
- Pen-on-paper writing experience with Ultra Fine Touch Technology
- Front-facing dual speakers to deliver attention-grabbing sound
- Webcam bracket easily attached with camera for better engagement
- Quad Core CPU with upgraded storage powered by ViewBoard OS 4.0



Product Description

The ViewBoard® 32-2 series is an advanced model that provides a comprehensive solution for schools and teachers looking to deliver more interactive and engaging lessons. Clearer colors, more vibrant contrast, and less glare are achieved thanks to 4K UHD display's bonding technology. With 20-point touchscreen interface, users collaborate naturally either with a finger or one of the ViewBoard styluses. The display integrates Ultra Fine Touch Technology which brings a paper-like writing experience with instant response and high accuracy. The dual-tip pen support allows you to simultaneously write or draw with two different colors. Seamless software integration is assured by the built-in access to the myViewBoard suite that brings together all the hardware. With upgraded RAM and storage, ViewBoard 32-2 Series offers instant connectivity and effortless usability for classroom engagement.

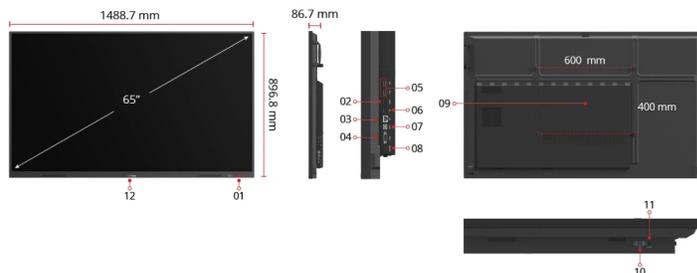

- | | |
|---------------------------------|-----------------------|
| 1. Smart Port USB™ X 2 | 8. Touch |
| 2. Camera | 9. Audio Out |
| 3. LAN | 10. VGA |
| 4. RS232 | 11. Audio In |
| 5. HDMI X 2 | 12. Wi-fi Module Slot |
| 6. USB 2.0 | |
| 7. VESA® Wall Mount 600 x 400mm | |

Visit Us

www.viewsonic.com

DISPLAY

Panel Size:	65"
Panel Type:	TFT LCD Module with DLED Backlight.
Display Area (mm):	1428.48(H)x 803.52 (V) (64.5" diagonal)
Aspect Ratio:	16:9
Resolution:	UHD 3840x2160(Pixels)
Colors:	1.07B colors (8bit+FRC)
Brightness:	350 nits (typ.)
Contrast Ratio:	4000:1
Response Time:	6.5ms
Viewing Angles:	H=178, V=178typ.
Backlight Life:	50,000 Hours (Min)
Surface Treatment:	Hardness: 9H Anti-glare coating
Orientation:	Landscape

PLATFORM

Processor:	ARM quad-core Cortex-A55
RAM:	4GB DDR4
Storage:	32 GB

TOUCH

Type/ Tech:	Ultra Fine Touch Technology
Touch Point:	20 points touch, 10 points writing

INPUT

HDMI:	HDMI 2.0 x2 (3840x2160 @60Hz)
RGB / VGA:	x1
Audio:	x1
RS232:	x1
OPS:	x1 (Optional Intel Standard OPS)
WiFi:	x1 (Optional VB-WIFI-002/VB-WIFI-004)

OUTPUT

Audio:	x1
--------	----

LAN

RJ45:	x1
-------	----

USB

Type A:	USB2.0 Front x2; Side x2
Type B:	x1 for HDMI/VGA touch

SPEAKERS

10W x 2

TOP CAMERA PLATE

Yes

EMBEDDED OS

Android 9

BUNDLE SOFTWARE

Basic Annotation Software:	myViewBoard Whiteboard
Pro Annotation Software:	myViewBoard Whiteboard for Windows (Embedded in optional Windows Slot-in PC)
Wireless Presentation:	myViewBoard Display & ViewBoard Cast

SPECIAL FEATURES

All-in-one USB port:	(combine slot-in PC/ViewBoard OS 4.0/HDMI USB port) Front "SmartPort™ USB" to all channels.
Simple LAN sharing between IFP and slot-in device:	10/100M for ViewBoard OS 4.0 & Slot-in PC
Light Sensor:	Yes

POWER

Voltage:	162V-264V +/- 10%
Consumption:	On: 175W(typ.) Off: ≤ 0.5W\

ERGONOMICS

Wall Mount (VESA®):	600*400
----------------------	---------

OPERATING CONDITIONS

Temperature (° C):	0°C to 40°C
Humidity:	10% ~ 90% RH non-condensing

DIMENSIONS (W X H X D)

Physical (inch / mm):	1489×897×87 mm / 58.6×35.3×3.4 in
Packaging (inch / mm):	1628×208×1005 mm / 64×8.2×39.5 in

WEIGHT

Net (lb / kg):	38.3kg/84.4lb
Gross (lb / kg):	46.0kg/101.4lb

REGULATIONS

EMC/CE , CB/LVD, GOST-R / EAC, FAC, RCM, BIS, ECAS, LBL (Low Blue Light Certification), RoHS, REACH, SCIP, WEEE, TPCH, Packing waste, CA65, Green BOM, ErP-Eco

PACKAGE CONTENTS

1. Power cord / 2.Remote control with AAA battery / 3.USB touch cable / 4. Touch pen x 2 / 5. Quick Start Guide + Compliance statement / 6. RS232 adapter / 7. Screw x 4 (wall mount 4) / 8. HDMI cable / 9. Clamp x5 / 10. Camera plate x1

COMPATIBLE SLOT-IN PC

VPC12-WPO/VPC25/VPC2C/VPC27 series
